

Telone kit

8 Bottom


John Deere 995



Furow stinger mount

- The 995 uses 2 spring mounted stingers to place Telone in furrow. Remove $\frac{3}{4}$ " bolt on frame holding gauge wheel place angle on bolt and re fasten. Stinger is adjustable by pitching up and down on angle iron brackets, tip is adjustable by pivoting on mount bolt.

- Ugly drawing. Both manifold stands go on 4"x 7" plow frame. Stand with extra bracket goes near tractor, mounts 3 way valve. Pump pod mount in between manifolds tee from output to both stands.

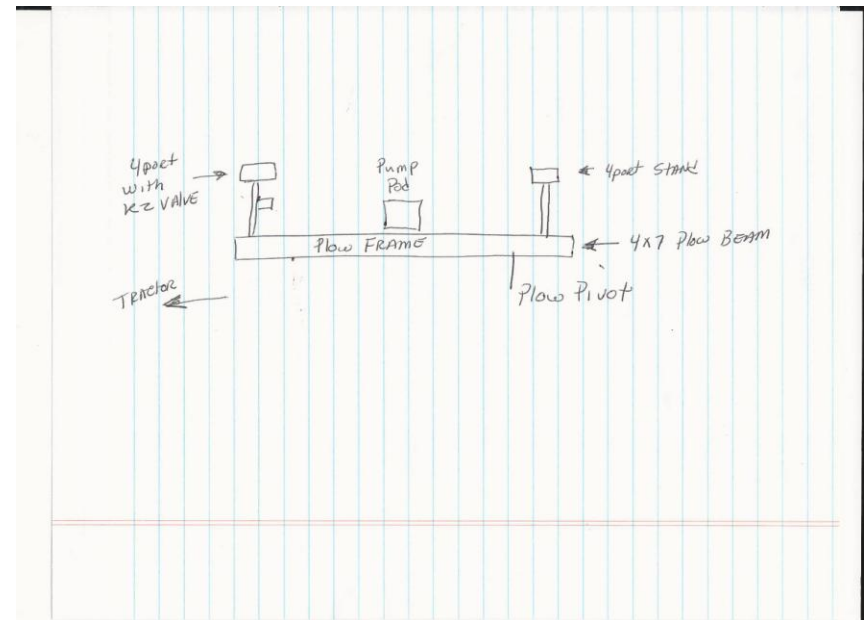

Whisker switch

- The magnetic based whisker switch operates the 3 way valve to switch outlet from right to left. Mount switch so whisker contact cylinder at end of stroke. Direction is not important if sides are wrong just swap red lines on valve. Black line on valve goes to outlet on manifold